

Inday

Multimedia Products

1818 NE 140th
Portland, OR 97230
503-575-1951

support@inday.com
www.inday.com


Video/Coax Distribution Amplifier

Model: VDA-1

- ★ Video or Coax Digital Audio Splitter: 1 IN to 4 OUT
- ★ Very Wideband Amplifier Circuit will not degrade the source
- ★ Guaranteed Frequency Response > 120MHz
- ★ Broadcast specs. .04% differential gain, .03% differential phase
- ★ Each output has its own High Current Cable Drive

The VDA-1 is a multipurpose utility distribution amplifier. Suitable for Coax Digital Audio or any format Analog Video signal from low resolution NTSC to HDTV.

Its wide bandwidth, flat frequency response and High Current outputs allow it to "Drive" very long cables, up to 500 feet (150 meters).

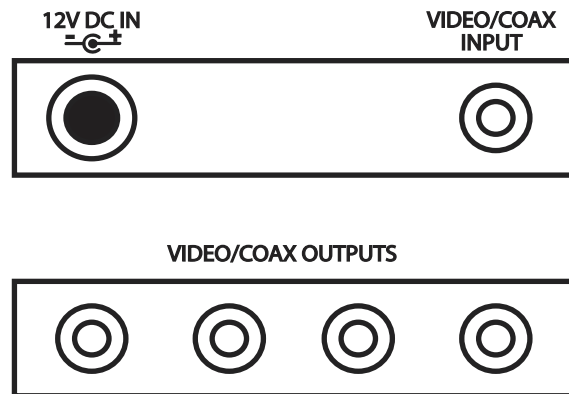

Specifications:

INPUTS:

1 RCA Gold Plated
Accepts Coax SPDIF format Audio
or Analog Video signal (PAL, NTSC, HDTV).

OUTPUTS:

4 RCA Gold Plated

POWER:

12VDC-Unregulated Nominal
@ 80ma Max.
Wall Transformer supplied

DIMENSION:

4"W x 2.5"L x 1"H

TEMPERATURE

0 TO 50 DEGREES C

HUMIDITY

0 TO 90% (non-condensing)

Typical Application

