



Multimedia Products

1818 NE 140th
Portland, OR 97230
503-575-1951



support@inday.com
www.inday.com

DUAL Toslink Distribution Amplifier

Model: TLDA-22

- Two Independent 1-In to 2-Out Toslink Splitters
- Not a passive splitter. Will not degrade the source signal
- Optically isolated inputs and outputs.
- Shutters on inputs and outputs. No Toslink Plugs
- Each output has its own Fiber Optic Transmitter

The TLDA-22 is a fully active device. The Inputs are converted from optical to electrical and sent to 2 independent Toslink Transmitters. This ensures that ONE bad fiber cable will not destroy your signal.

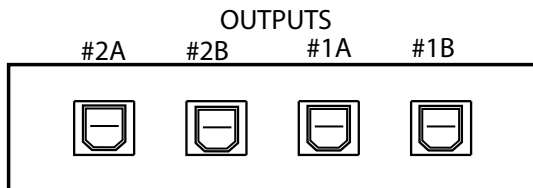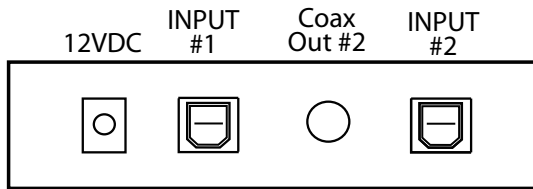

Specifications:

INPUT:
2 Toslink w/Shutter
Accepts any standard SPDIF format

ALL OUTPUTS:
4 Toslink w/Shutters

POWER:
12VDC-Unregulated Nominal
@ 60ma Max.
Wall Transformer supplied

DIMENSION:
4"W x 2.5"L x 1"H

TEMPERATURE
0 TO 50 DEGREES C

HUMIDITY
0 TO 90% (non-condensing)

Typical Application

